



SELECT 4016E Heavy-Duty Edger

- **Hydraulically adjustable feed rate up to 200 FPM**
- **Capacity up to 4" thick x 40" wide (max. board output 30" wide)**
- **Computerized setworks - 12 programmable presets**



SELECT 4016E



Lasers




Anti-kickback



Split Blades



Door Opening
for Blade Change

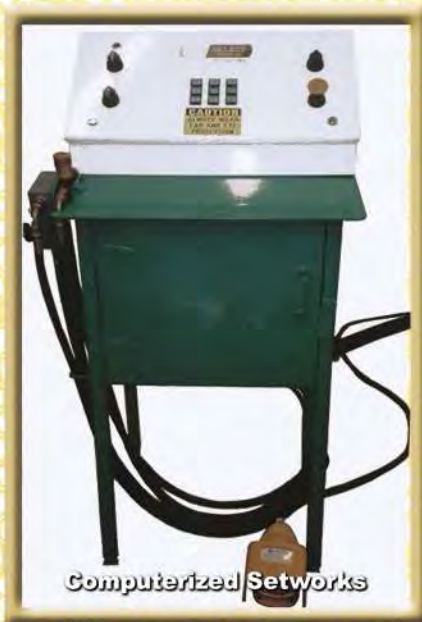

Computerized Setworks



Outfeed

OUTSTANDING FEATURES

Shaft Lube - Computerized shaft lube system in auto mode every 3 minutes and a manual switch to lubricate any time desired.

Hydraulically Lifted Top Rollers
Use the floor pedal to hydraulically lift top rollers for easy entry of wood up to 4" thick. Adjustable height can be locked and easily controlled from the operator's panel.

Split Blades for Fast and Easy Installation - The split blades can be changed very easily in only 20 minutes.

SPECIFICATIONS

Motor30 hp electric
Blades2 - 16" split - 2 piece carbide
Feed2 - live infeed rolls 6" in dia.
 2 - live outfeed rolls 6" in dia.
 2 - 8" in dia. top rollers
Frame3" x 6" rectangular tubing
Main Arbour2 11/16"
Blade
Adjustmentfrom 2" to 30"
Capacity4" thick x 40" wide
Feed Speed....0 to 200 FPM
Computerized
Setworks12 programmable presets
Shaft Lubeautomatically every 3 minutes
System and manually at any time

Specifications herein are subject to change.



5889 County Road 17
P.O. Box 81
Plantagenet, ON
CANADA K0B 1L0

T. (613) 673-1267 / F. (613) 673-2854
info@selectsawmill.com
www.selectsawmill.com